



Product for illustration purpose only.

Overview

The Compact Series LED panel is a game-changer in modern lighting solutions, designed to offer exceptional performance and versatility across various settings. With its sleek and minimalist design, this panel seamlessly integrates into ceilings, providing uniform and glare-free illumination for offices, schools, retail spaces, and more.



Product data

General information

Dimensions (mm)	595 x 595 x 29 mm
Materials (Body)	Powdercoated Aluminium
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	1.3 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK03
Article no.	PECL-COMP4K40

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC220-240V (PEC Driver)
Safety Class	II
Circuit Wattage (W)	40
LED Wattage (W)	40
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	N/A

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	4000 lm
Efficacy (lm/W)	100
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	595
Width	595
Height	29
Product Weight	1.3 kg
Cable Length	100 mm

Dimensional drawing

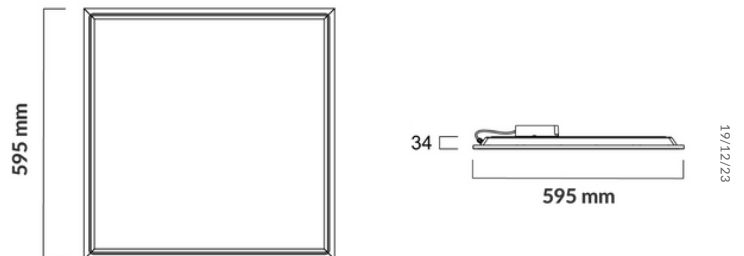

LED Panel 40W / 4000K / 4000LM



Product for illustration purpose only.

Overview

The Lumen Series LED panel is a game-changer in modern lighting solutions, designed to offer exceptional performance and versatility across various settings. With its sleek and minimalist design, this panel seamlessly integrates into ceilings, providing uniform and glare-free illumination for offices, schools, retail spaces, and more.



Product data

General information

Dimensions (mm)	595 x 595 x 29 mm
Materials (Body)	Powdercoated Aluminium
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	1.3 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK03
Article no.	PECL-COMP6K40

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC220-240V (PEC Driver)
Safety Class	II
Circuit Wattage (W)	40
LED Wattage (W)	40
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	N/A

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	6500K
Luminous flux	4000
Efficacy (lm/W)	100
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	595
Width	595
Height	29
Product Weight	1.3 kg
Cable Length	100 mm

Dimensional drawing

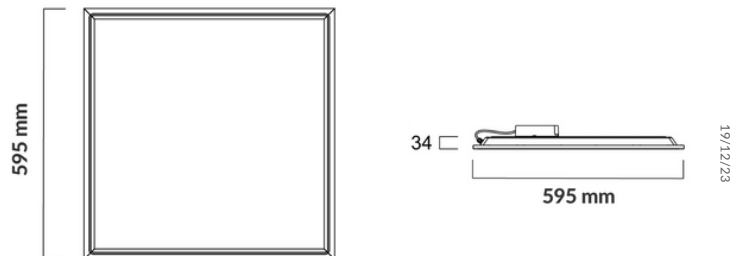

LED Panel 40W / 6500K / 4000LM