

Overview

The Motion Panel with Sensor represents a revolutionary advancement in lighting technology, seamlessly integrating motion detection capabilities into a sleek and functional panel design. This innovative lighting solution combines the benefits of efficient LED panels with the added intelligence of motion sensors, enhancing both energy savings and convenience in various environments.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 92 x 72 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.28 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLMOT4K15

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	15
LED Wattage (W)	15
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm35

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmm, Rohs,
-----------	----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	1200
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	237
Width	237
Height	63
Product Weight	0.28 kg
Cable Length	50mm

Dimensional drawing

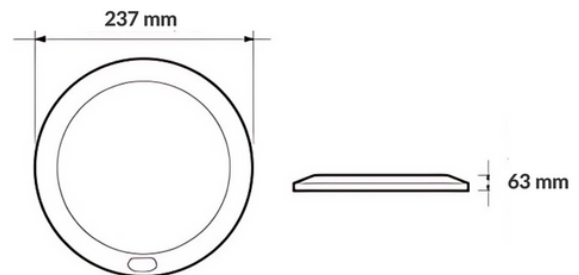

19/12/23

Downlight 15W / 4000K / 1200LM