

## Overview

The LineaLED Triproof Light represents a cutting-edge lighting solution engineered for demanding environments where durability, efficiency, and exceptional illumination are paramount. Designed with versatility in mind, this fixture is crafted to withstand harsh conditions while delivering superior lighting performance across various industrial and commercial settings.



Product for illustration purpose only.

### Product data

#### General information

|                         |                  |
|-------------------------|------------------|
| Dimensions (mm)         | 900 x 75 x 63 mm |
| Materials (Body)        | PS               |
| Materials (Diffuser)    | PS               |
| Finish                  | White            |
| Product Weight (Kg)     | 0.63 kg          |
| Ingress Protection (IP) | IP65             |
| Impact Rating (IK)      | IK10             |
| Article no.             | PECLLIN4D30      |

#### Supply & power information

|                                     |                    |
|-------------------------------------|--------------------|
| Input Voltage & Frequency (V~ / Hz) | AC100V-277V        |
| Safety Class                        | II                 |
| Circuit Wattage (W)                 | 30                 |
| LED Wattage (W)                     | 30                 |
| Power Factor                        | >0.9               |
| Operating Temperature (°C)          | (-)20°C to (+)45°C |
| Critical Temperature (°C)           | (+)60°             |
| Input Mains Cable                   | H07RN-F 3x1 mm17   |

#### Dimming Information

|          |     |
|----------|-----|
| Dimmable | N/A |
|----------|-----|

#### Certificates & Standards

|           |                |
|-----------|----------------|
| Standards | CE, Cmm, Rohs, |
|-----------|----------------|


#### Luminaire Output

|                           |          |
|---------------------------|----------|
| Colour Temperature (K)    | 4000K    |
| Luminous flux             | 2700     |
| Efficacy (lm/W)           | 90       |
| Colour Render Index (CRI) | ≥80      |
| Beam Angle (°)            | 120°     |
| LED Lifetime (Hours)      | 50.000 H |

#### Dimensions & Weight

|                |         |
|----------------|---------|
| Length         | 900     |
| Width          | 75      |
| Height         | 63      |
| Product Weight | 0.63 kg |
| Cable Length   | 100 mm  |

### Dimensional drawing

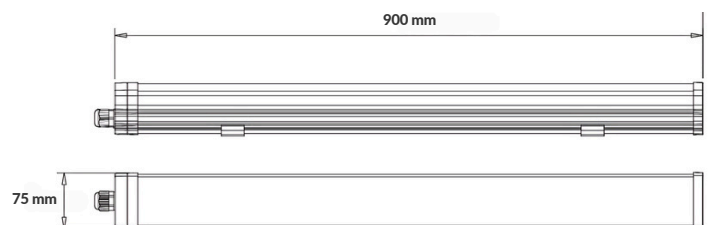

19/12/23

Triproof 30W / 4000K / 2700LM

## Overview

The LineaLED Triproof Light represents a cutting-edge lighting solution engineered for demanding environments where durability, efficiency, and exceptional illumination are paramount. Designed with versatility in mind, this fixture is crafted to withstand harsh conditions while delivering superior lighting performance across various industrial and commercial settings.



Product for illustration purpose only.

### Product data

#### General information

|                         |                   |
|-------------------------|-------------------|
| Dimensions (mm)         | 1200 x 75 x 63 mm |
| Materials (Body)        | PS                |
| Materials (Diffuser)    | PS                |
| Finish                  | White             |
| Product Weight (Kg)     | 0.73 kg           |
| Ingress Protection (IP) | IP65              |
| Impact Rating (IK)      | IK10              |
| Article no.             | PECLIN4D40        |

#### Supply & power information

|                                     |                    |
|-------------------------------------|--------------------|
| Input Voltage & Frequency (V~ / Hz) | AC100V-277V        |
| Safety Class                        | II                 |
| Circuit Wattage (W)                 | 40                 |
| LED Wattage (W)                     | 40                 |
| Power Factor                        | >0.9               |
| Operating Temperature (°C)          | (-)20°C to (+)45°C |
| Critical Temperature (°C)           | (+)60°             |
| Input Mains Cable                   | H07RN-F 3x1 mm18   |

#### Dimming Information

|          |     |
|----------|-----|
| Dimmable | N/A |
|----------|-----|

#### Certificates & Standards

|           |                |
|-----------|----------------|
| Standards | CE, Cmm, Rohs, |
|-----------|----------------|


#### Luminaire Output

|                           |          |
|---------------------------|----------|
| Colour Temperature (K)    | 6500K    |
| Luminous flux             | 3600     |
| Efficacy (lm/W)           | 90       |
| Colour Render Index (CRI) | ≥80      |
| Beam Angle (°)            | 120°     |
| LED Lifetime (Hours)      | 50.000 H |

#### Dimensions & Weight

|                |         |
|----------------|---------|
| Length         | 1200    |
| Width          | 75      |
| Height         | 63      |
| Product Weight | 0.73 kg |
| Cable Length   | 100 mm  |

### Dimensional drawing

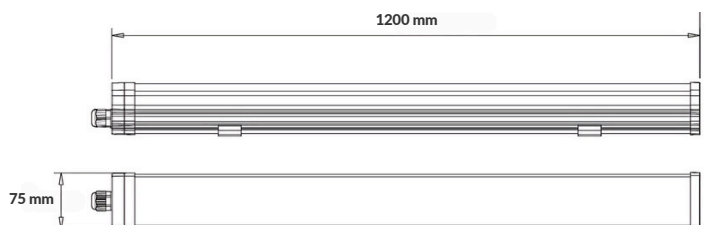

19/12/23

Triproof 40W / 6500K / 3600LM

## Overview

The LineaLED Triproof Light represents a cutting-edge lighting solution engineered for demanding environments where durability, efficiency, and exceptional illumination are paramount. Designed with versatility in mind, this fixture is crafted to withstand harsh conditions while delivering superior lighting performance across various industrial and commercial settings.



Product for illustration purpose only.

### Product data

#### General information

|                         |                   |
|-------------------------|-------------------|
| Dimensions (mm)         | 1500 x 75 x 63 mm |
| Materials (Body)        | PS                |
| Materials (Diffuser)    | PS                |
| Finish                  | White             |
| Product Weight (Kg)     | 0.8 kg            |
| Ingress Protection (IP) | IP65              |
| Impact Rating (IK)      | IK10              |
| Article no.             | PECLLIN4D50       |

#### Luminaire Output

|                           |          |
|---------------------------|----------|
| Colour Temperature (K)    | 6500K    |
| Luminous flux             | 4500     |
| Efficacy (lm/W)           | 90       |
| Colour Render Index (CRI) | ≥80      |
| Beam Angle (°)            | 120°     |
| LED Lifetime (Hours)      | 50.000 H |

#### Dimensions & Weight

|                |        |
|----------------|--------|
| Length         | 1500   |
| Width          | 75     |
| Height         | 63     |
| Product Weight | 0.8 kg |
| Cable Length   | 100 mm |

#### Supply & power information

|                                     |                    |
|-------------------------------------|--------------------|
| Input Voltage & Frequency (V~ / Hz) | AC100V-277V        |
| Safety Class                        | II                 |
| Circuit Wattage (W)                 | 50                 |
| LED Wattage (W)                     | 50                 |
| Power Factor                        | >0.9               |
| Operating Temperature (°C)          | (-)20°C to (+)45°C |
| Critical Temperature (°C)           | (+)60°             |
| Input Mains Cable                   | H07RN-F 3x1 mm19   |


#### Dimming Information

|          |     |
|----------|-----|
| Dimmable | N/A |
|----------|-----|

#### Certificates & Standards

|           |                |
|-----------|----------------|
| Standards | CE, Cmm, Rohs, |
|-----------|----------------|

### Dimensional drawing

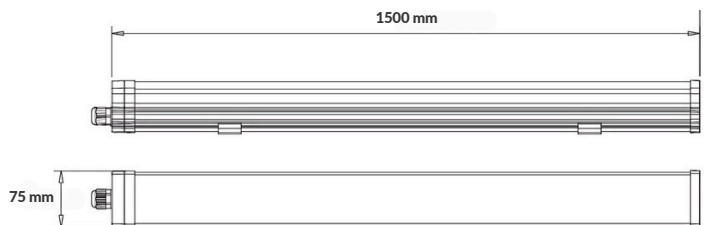

19/12/23

Triproof 50W / 6500K / 4500LM