

Overview

Skylight Downlight Spotlights redefine the ambiance of spaces with their unparalleled blend of functionality, elegance, and innovative lighting technology. These spotlights stand as a testament to sophistication and versatility, offering a transformative lighting experience for both residential and commercial environments.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 110 x 38 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.015 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSKY4K9

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	9
LED Wattage (W)	9
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm27

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmm, Rohs,
-----------	----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	720
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	110
Width	110
Height	38
Product Weight	0.015 kg
Cable Length	50mm

Dimensional drawing

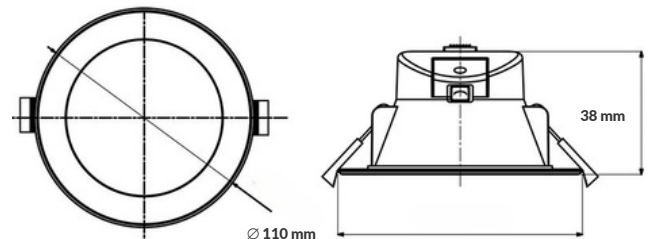

19/12/23

Downlight 9W / 4000K / 720LM

Overview

Skylight Downlight Spotlights redefine the ambiance of spaces with their unparalleled blend of functionality, elegance, and innovative lighting technology. These spotlights stand as a testament to sophistication and versatility, offering a transformative lighting experience for both residential and commercial environments.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 90 x 32 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.015 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSKY4K5

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	5
LED Wattage (W)	5
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm25

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmm, Rohs,
-----------	----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	400
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	90
Width	90
Height	32
Product Weight	0.015 kg
Cable Length	50mm

Dimensional drawing

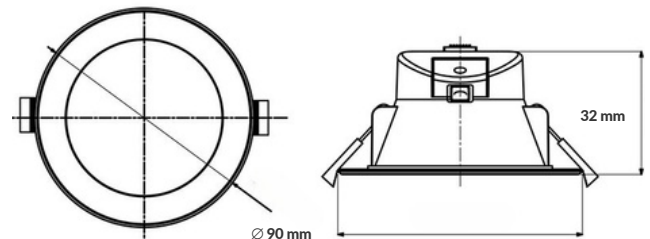

19/12/23

Downlight 5W / 4000K / 400LM

Overview

Skylight Downlight Spotlights redefine the ambiance of spaces with their unparalleled blend of functionality, elegance, and innovative lighting technology. These spotlights stand as a testament to sophistication and versatility, offering a transformative lighting experience for both residential and commercial environments.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 75 x 28 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.015 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSKY4K3

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	3
LED Wattage (W)	3
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm24

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmm, Rohs,
-----------	----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	240
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	75
Width	75
Height	28
Product Weight	0.015 kg
Cable Length	50mm

Dimensional drawing

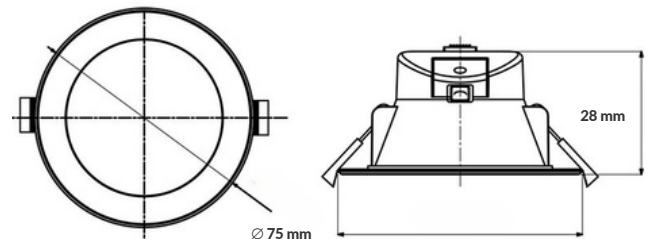

19/12/23

Downlight 3W / 4000K / 240LM

Overview

Skylight Downlight Spotlights redefine the ambiance of spaces with their unparalleled blend of functionality, elegance, and innovative lighting technology. These spotlights stand as a testament to sophistication and versatility, offering a transformative lighting experience for both residential and commercial environments.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 110 x 38 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.015 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSKY3K9

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	9
LED Wattage (W)	9
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm27

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	3000K
Luminous flux	720
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	110
Width	110
Height	38
Product Weight	0.015 kg
Cable Length	50mm

Dimensional drawing

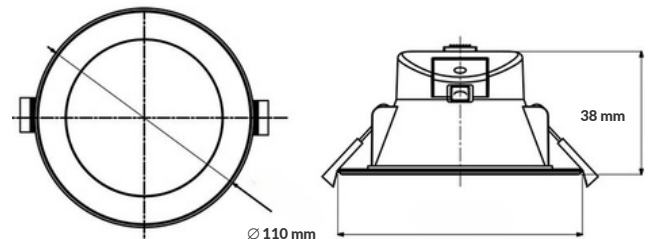

19/12/23

Downlight 9W / 3000K / 720LM

Overview

Skylight Downlight Spotlights redefine the ambiance of spaces with their unparalleled blend of functionality, elegance, and innovative lighting technology. These spotlights stand as a testament to sophistication and versatility, offering a transformative lighting experience for both residential and commercial environments.



Product for illustration purpose only.



Product data

General information

Dimensions (mm)	Ø 90 x 32 mm
Materials (Body)	PS
Materials (Diffuser)	PS
Finish	White
Product Weight (Kg)	0.015 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSKY4K7

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC100V-277V
Safety Class	II
Circuit Wattage (W)	7
LED Wattage (W)	7
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	H07RN-F 3x1 mm26

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	560
Efficacy (lm/W)	80
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions & Weight

Length	90
Width	90
Height	32
Product Weight	0.015 kg
Cable Length	50mm

Dimensional drawing

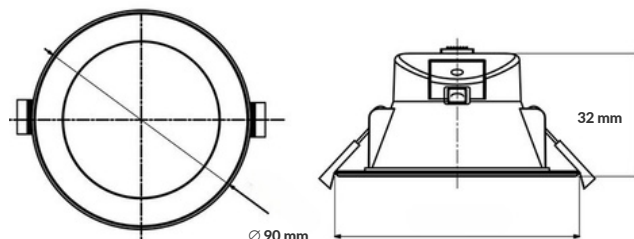

19/12/23

Downlight 7W / 4000K / 560LM