

Overview

Introducing Glänsa, the epitome of sophistication and illumination from PEC Lighting. Elevate your space with this exquisite downlight that seamlessly blends style and functionality. Designed with precision and crafted with premium materials, Glänsa casts a warm, inviting glow that transforms any room into a haven of ambient brilliance.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 125 x 45 mm
Materials (Body)	AL
Materials (Diffuser)	Glass
Finish	White
Product Weight (Kg)	0.411 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSPOTGLNSA3K10

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC170V-240V
Safety Class	II
Circuit Wattage (W)	10
LED Wattage (W)	10
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	-

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	3000K
Luminous flux	900
Efficacy (lm/W)	90
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions (mm) & Weight

Length	125
Width	125
Height	45
Product Weight	0.411 kg
Cable Length	50mm

Dimensional drawing

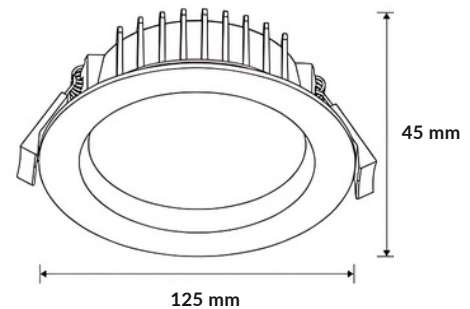

14/1/24

Downlight 10W / 3000K / 900LM

Overview

Introducing Glänsa, the epitome of sophistication and illumination from PEC Lighting. Elevate your space with this exquisite downlight that seamlessly blends style and functionality. Designed with precision and crafted with premium materials, Glänsa casts a warm, inviting glow that transforms any room into a haven of ambient brilliance.



Product for illustration purpose only.

Product data

General information

Dimensions (mm)	Ø 185 x 45 mm
Materials (Body)	AL
Materials (Diffuser)	Glass
Finish	White
Product Weight (Kg)	0.411 kg
Ingress Protection (IP)	IP20
Impact Rating (IK)	IK10
Article no.	PECLSPOTGLNSA4K20

Supply & power information

Input Voltage & Frequency (V~ / Hz)	AC170V-240V
Safety Class	II
Circuit Wattage (W)	20
LED Wattage (W)	20
Power Factor	>0.9
Operating Temperature (°C)	(-)20°C to (+)45°C
Critical Temperature (°C)	(+)60°
Input Mains Cable	-

Dimming Information

Dimmable	N/A
----------	-----

Certificates & Standards

Standards	CE, Cmim, Rohs,
-----------	-----------------


Luminaire Output

Colour Temperature (K)	4000K
Luminous flux	1800
Efficacy (lm/W)	90
Colour Render Index (CRI)	≥80
Beam Angle (°)	120°
LED Lifetime (Hours)	50.000 H

Dimensions (mm) & Weight

Length	185
Width	185
Height	45
Product Weight	0.411 kg
Cable Length	50mm

Dimensional drawing

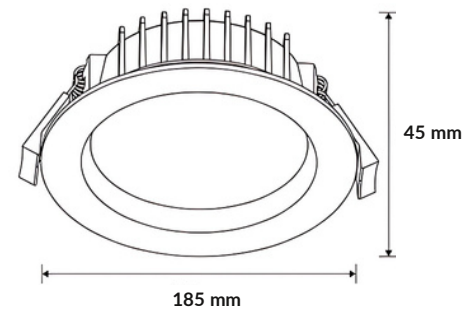

14/1/24

Downlight 20W / 4000K / 1800LM